


# Flash Check

## Jumbo Display Digital Pocket Probe Thermometer for Industrial Applications

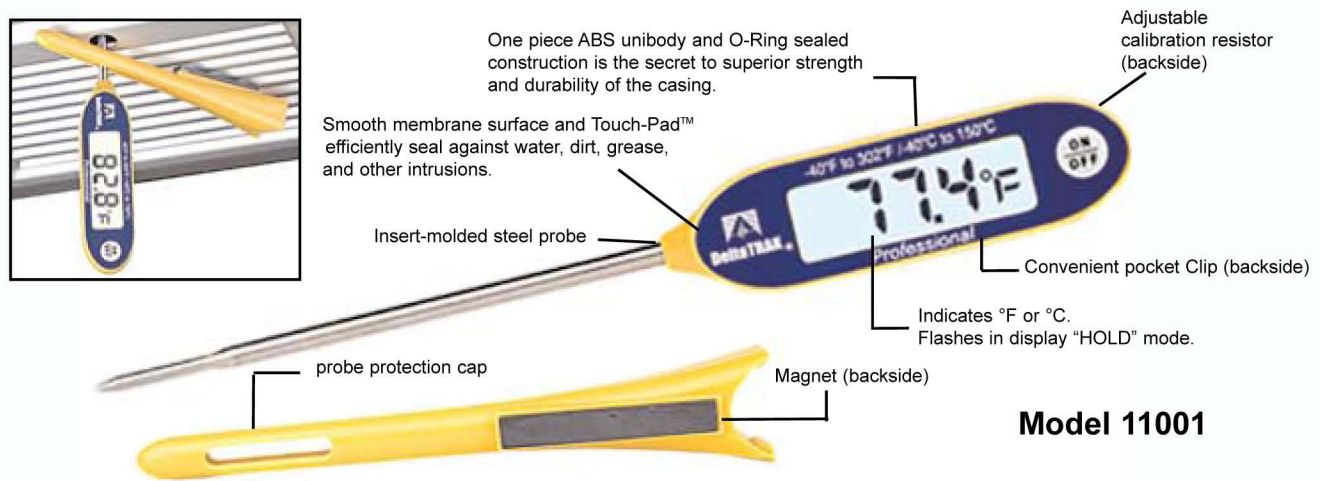

This unique, next-generation, digital pocket probe thermometer is engineered to set the industry standard for accuracy, durability and readability. It is designed and constructed under exacting standards to meet and exceed the specifications required for commercial and industrial uses.

- Highly visible dual scale Jumbo LCD display
- Reduced tip probe that provides 300% faster response time
- Probe cover with a magnet designed to attach thermometer to a vent
- Pocket clip that has an integrated screwdriver for field calibration
- Velcro strap included to secure thermometer to refrigerant pipes
- IP56 rated for water, dirt & grease resistant
- High visibility yellow casing

Patent no. 5,709,476

|                               |  |
|-------------------------------|--|
| Temperature Range             | -40°F a 302°F (-40°C a 150°C)  |
| Accuracy                      | ±1°F (-4°F to 194°F), ±0.5°C (-20°C to 90°C);<br>otherwise ±1.8°F (±1°C)                                   |
| Resolution                    | 0.1°F (0.1°C)  |
| Display Size/Update           | 1.5" x 0.5" (38mm x 12.7mm)/Every 2 Second   |
| Waterproof Rating             | IP56   |
| Probe length and tip diameter | Stainless steel probe, 3.9 +/- 0.004 inch. (99 +/-0.1mm);<br>Reduced probe tip 0.1 inch. (2.3 mm) diameter |
| Body/Dimensions               | Polycarbonate & ABS/6.98 in. (177.3mm) long  |
| Calibration                   | Field calibratable. NIST traceable calibration certifiable.  |
| Compliance certificate        | Manufacturers certificate of compliance available from DeltaTRAK   |
| Battery                       | 1.5v Button  |